


CM-ITX500

NEW

Embedded Chassis for Mini-ITX SBC

Features

- Designed for low power Mini-ITX SBC
- One 2.5" SSD/HDD supported
- Supports one PCI Express card slot
- Side cooling holes enhance the ventilation effect
- Three D-Sub connectors at the rear side

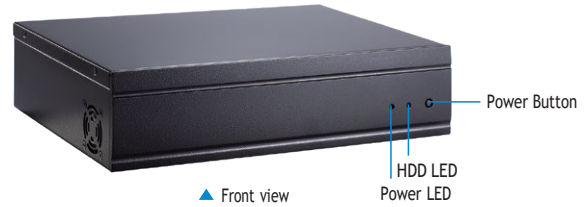

Specifications

Standard Color	Black
Construction	Heavy-duty cold-rolled steel
Indicator	1 x Green LED for system power-on 1 x Red LED HDD Active
Panel I/O	Front 1 x Power button
	Rear 1 x Standard Mini-ITX I/O bracket space 3 x D-Sub connector 1 x PCI Express card slot
Expansion Interface	1 x PCI Express card slot
Storage	1 x 2.5" HDD
Dimensions	217.2 mm (8.55") (D) x 300 mm (11.81") (W) x 74 mm (2.91") (H)
Environment	EMI pre-scan meets EN55032 Class A

Applications

Embedded PC controller
Compact industrial PC
POS
Digital Signage

Ordering Information

Standard	
CM-ITX500 (P/N: E272500101)	Embedded MicroBox for low power Mini-ITX SBC
SBC Options	
MANO842/MANO300/MANO500/MANO520/MANO540	
Power Supply Options	
50916624000E	Flex ATX 250W FSP250-50FGBBIM w/cable

Dimensions

